


Model 1 Screw shaft (Cross recessed head)




DR-B

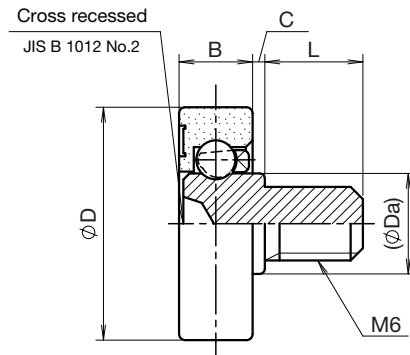

Model 2 Screw shaft (Cross recessed head and rosette coined)




DR-B

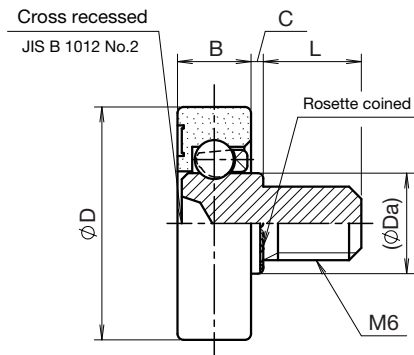

Model 3 Screw shaft (Hex socket screw)



DR-B-JH

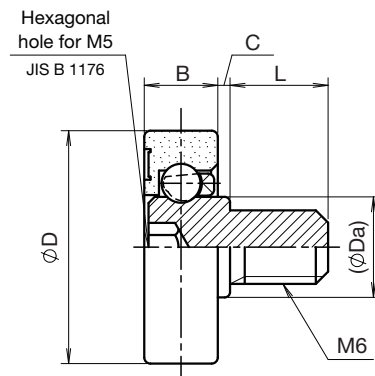

Product information

Feature classification

Outer race type

Flat	Convex round	U-groove
V-groove	Concave groove	One-sided flange
Plastic	Stainless steel	Steel
Ceramic	Rubber	

Inner race type

Inner ring	Inner race width wide
Screw shaft	Riveting shaft

Feature

Water resistant	Heat resistant	Chemical resistant
Antistatic	Non magnetic	High speed rotation
High load	Toughness	Low noise

Components of product name

No	Item	Symbol	Meaning
1	Outer race material symbol	D	Polyacetal resin
2	Outer race shape symbol	R	Flat
3	Retainer or full ball type	Omitted	Retainer (Polypropylene)
4	Outer race outer diameter	-	(Numerical ϕD dimension shown in drawing)
5	Ball material symbol	Omitted	Carbon steel ball
6	Inner race shape symbol	B	Screw shaft
7	Inner race material symbol	Omitted	Carbon steel (Plating)
8	Bore and clearance dimension for mounting	-	(Numerical C dimension shown in drawing)
9	Additional information	M6×8 JH	Screw specification × Screw length L dimension Hex socket screw

Lineup

DR-B

Screw shaft

(mm)

Model	D ⁰ _{-0.1}	B ⁰ _{-0.2}	C ^{±0.4}	L ^{±0.5}	Da	Screw specification	Rosette coined	Load (N)	Weight (g)	Code	Part No.
1	19	6	0.5	8	8.2	M6 P1.0	-	49.0	5.8	020200	DR-19-B0.5
2		6	1	8	8.2	M6 P1.0	●	49.0	6.0	020204	DR-19-B1
2		6	2	8	8.2	M6 P1.0	●	49.0	6.4	020209	DR-19-B2
2		6	3	8	8.2	M6 P1.0	●	49.0	7.0	020214	DR-19-B3
1	20	7	0.5	8	9.5	M6 P1.0	-	196.0	-	020304	DR-20-B0.5
2		7	0.5	8	9.5	M6 P1.0	●	196.0	8.5	020400	DR-22-B0.5
2		7	1	8	9.5	M6 P1.0	●	196.0	8.8	020406	DR-22-B1
2		7	2	8	9.5	M6 P1.0	●	196.0	9.3	020409	DR-22-B2
2	22	7	3	8	9.5	M6 P1.0	●	196.0	9.9	020413	DR-22-B3
2		7	4	8	9.5	M6 P1.0	●	196.0	10.6	020416	DR-22-B4
2		7	5	8	9.5	M6 P1.0	●	196.0	11.1	020420	DR-22-B5
2		7	6	8	9.5	M6 P1.0	●	196.0	11.6	020422	DR-22-B6
1	24	7	0.5	8	9.5	M6 P1.0	-	196.0	9.2	020600	DR-24-B0.5
2		7	1	8	9.5	M6 P1.0	●	196.0	-	-	DR-24-B1-M6×8
2		7	2	8	9.5	M6 P1.0	●	196.0	10.0	020602	DR-24-B2
2		7	3	8	9.5	M6 P1.0	●	196.0	10.7	020604	DR-24-B3
1	26	7	0.5	8	9.5	M6 P1.0	-	196.0	9.2	020700	DR-26-B0.5
2		7	1	8	9.5	M6 P1.0	●	196.0	-	-	DR-26-B1-M6×8
2		7	2	8	9.5	M6 P1.0	●	196.0	10.7	020705	DR-26-B2
2		7	3	8	9.5	M6 P1.0	●	196.0	11.3	020707	DR-26-B3
2	28	7	4	8	9.5	M6 P1.0	●	196.0	11.9	020710	DR-26-B4
2		7	5	8	9.5	M6 P1.0	●	196.0	-	020713	DR-26-B5
2		7	6	8	9.5	M6 P1.0	●	196.0	12.9	020715	DR-26-B6
1		7	0.5	8	9.5	M6 P1.0	-	196.0	10.8	020800	DR-28-B0.5
2	30	7	1	8	9.5	M6 P1.0	●	196.0	-	-	DR-28-B1-M6×8
2		7	2	8	9.5	M6 P1.0	●	196.0	11.6	020801	DR-28-B2
2		7	3	8	9.5	M6 P1.0	●	196.0	-	020807	DR-28-B3
1		7	0.5	8	9.5	M6 P1.0	-	196.0	10.9	021000	DR-30-B0.5
2	35	7	1	8	9.5	M6 P1.0	●	196.0	-	-	DR-30-B1-M6×8
2		7	2	8	9.5	M6 P1.0	●	196.0	-	-	DR-30-B2-M6×8
2		7	3	8	9.5	M6 P1.0	●	196.0	12.3	021002	DR-30-B3

DR-B-JH

Screw shaft (Hex socket screw)

(mm)

Model	D ⁰ _{-0.1}	B ⁰ _{-0.2}	C ^{±0.4}	L ^{±0.5}	Da	Screw specification	Rosette coined	Load (N)	Weight (g)	Code	Part No.
3	22	7	0.5	8	9.5	M6 P1.0	-	196.0	8.5	020561	DR-22-B0.5-JH
3	24	7	0.5	8	9.5	M6 P1.0	-	196.0	9.2	020611	DR-24-B0.5-JH
3	26	7	0.5	8	9.5	M6 P1.0	-	196.0	9.9	020744	DR-26-B0.5-JH
3	28	7	0.5	8	9.5	M6 P1.0	-	196.0	10.5	020808	DR-28-B0.5-JH
3	30	7	0.5	8	9.5	M6 P1.0	-	196.0	12.0	021013	DR-30-B0.5-JH
3	35	7	0.5	8	9.5	M6 P1.0	-	196.0	-	021103	DR-35-B0.5-JH

*All products are made-to-order only, but some may be in stock. Please contact your local distributor or trading company in case of urgent need.