



Model 1 Screw shaft (Cross recessed head)

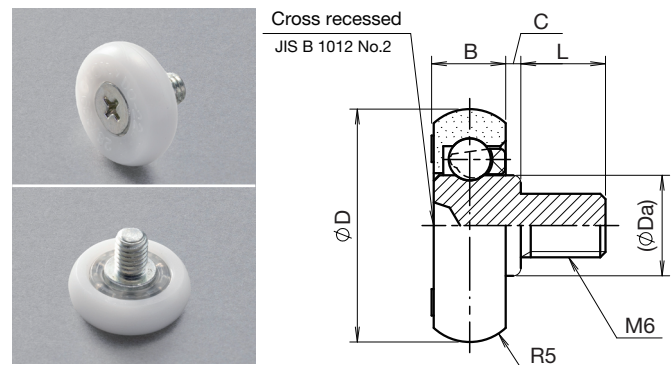


DO-B

Model 2 Screw shaft (Cross recessed head and rosette coined)

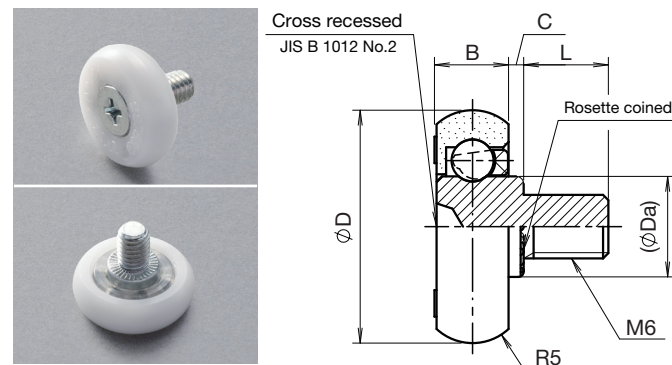

DO-B

Model 3 Screw shaft (Hex socket screw)

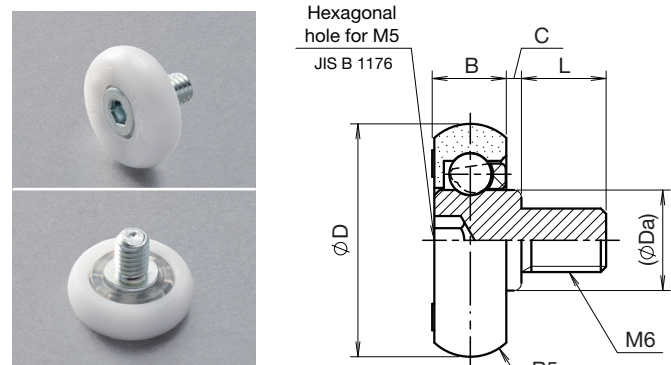

DO-B-JH

Product information

Feature classification

Outer race type

Flat	Convex round	U-groove
V-groove	Concave groove	One-sided flange
Plastic	Stainless steel	Steel
Ceramic	Rubber	

Inner race type

Inner ring	Inner race width wide
Screw shaft	Riveting shaft

Feature

Water resistant	Heat resistant	Chemical resistant
Antistatic	Non magnetic	High speed rotation
High load	Toughness	Low noise

Components of product name

No	Item	Symbol	Meaning
1	Outer race material symbol	D	Polyacetal resin
2	Outer race shape symbol	O	Convex round
3	Retainer or full ball type	Omitted	Retainer (Polypropylene)
4	Outer race outer diameter	-	(Numerical ØD dimension shown in drawing)
5	Ball material symbol	Omitted	Carbon steel ball
6	Inner race shape symbol	B	Screw shaft
7	Inner race material symbol	Omitted	Carbon steel (Plating, Black oxide treatment)
8	Bore and clearance dimension for mounting	-	(Numerical C dimension shown in drawing)
9	Additional information	M6×8 JH	Screw specification × Screw length L dimension Hex socket screw

Lineup

DO-B

Screw shaft

Model	D ⁰ _{-0.2}	B ⁰ _{-0.2}	C ^{±0.4}	L ^{±0.5}	Da	Screw specification	Rosette coined	Load (N)	Weight (g)	Code	Part No.
1	19	6	0.5	8	8.2	M6 P1.0	-	49.0	5.7	071010	DO-19-B0.5
2		6	1	8	8.2	M6 P1.0	●	49.0	-	-	DO-19-B1-M6×8
2		6	2	8	8.2	M6 P1.0	●	49.0	-	-	DO-19-B2-M6×8
2		6	3	8	8.2	M6 P1.0	●	49.0	-	071017	DO-19-B3
1	22	7	0.5	8	9.5	M6 P1.0	-	196.0	-	071020	DO-22-B0.5
2		7	1	8	9.5	M6 P1.0	●	196.0	-	-	DO-22-B1-M6×8
2		7	2	8	9.5	M6 P1.0	●	196.0	8.3	071019	DO-22-B2
2		7	3	8	9.5	M6 P1.0	●	196.0	-	-	DO-22-B3-M6×8
2		7	4	8	9.5	M6 P1.0	●	196.0	-	-	DO-22-B4-M6×8
2		7	5	8	9.5	M6 P1.0	●	196.0	10.9	071023	DO-22-B5
2	24	7	6	8	9.5	M6 P1.0	●	196.0	-	-	DO-22-B6-M6×8
1		7	0.5	8	9.5	M6 P1.0	-	196.0	8.9	071030	DO-24-B0.5
2		7	1	8	9.5	M6 P1.0	●	196.0	-	-	DO-24-B1-M6×8
2		7	2	8	9.5	M6 P1.0	●	196.0	9.8	071031	DO-24-B2
2		7	3	8	9.5	M6 P1.0	●	196.0	10.3	071032	DO-24-B3
1		7	0.5	8	9.5	M6 P1.0	-	196.0	9.6	071040	DO-26-B0.5
2	26	7	1	8	9.5	M6 P1.0	●	196.0	-	-	DO-26-B1-M6×8
2		7	2	8	9.5	M6 P1.0	●	196.0	-	-	DO-26-B2-M6×8
2		7	3	8	9.5	M6 P1.0	●	196.0	-	-	DO-26-B3-M6×8
2		7	4	8	9.5	M6 P1.0	●	196.0	-	-	DO-26-B4-M6×8
2		7	5	8	9.5	M6 P1.0	●	196.0	-	-	DO-26-B5-M6×8
2		7	6	8	9.5	M6 P1.0	●	196.0	-	-	DO-26-B6-M6×8
1	28	7	0.5	8	9.5	M6 P1.0	-	196.0	10.4	071050	DO-28-B0.5
2		7	1 ^{±0.5}	8	9.5	M6 P1.0	●	196.0	-	-	DO-28-B1-M6×8
2		7	2	8	9.5	M6 P1.0	●	196.0	-	-	DO-28-B2-M6×8
2		7	3	8	9.5	M6 P1.0	●	196.0	-	-	DO-28-B3-M6×8
1	30	7	0.5	8	9.5	M6 P1.0	-	196.0	-	-	DO-30-B0.5-M6×8
2		7	1	8	9.5	M6 P1.0	●	196.0	-	-	DO-30-B1-M6×8
2		7	2	8	9.5	M6 P1.0	●	196.0	-	-	DO-30-B2-M6×8
2		7	3	8	9.5	M6 P1.0	●	196.0	11.9	071060	DO-30-B3

DO-B-JH

Screw shaft (Hex socket screw)

Model	D ⁰ _{-0.2}	B ⁰ _{-0.2}	C ^{±0.4}	L ^{±0.5}	Da	Screw specification	Rosette coined	Load (N)	Weight (g)	Code	Part No.
3	22	7	0.5	8	9.5	M6 P1.0	-	196.0	7.7	071066	DO-22-B0.5-JH
3	24	7	0.5	8	9.5	M6 P1.0	-	196.0	8.8	071037	DO-24-B0.5-JH
3	26	7	0.5	8	9.5	M6 P1.0	-	196.0	9.5	071069	DO-26-B0.5-JH
3	28	7	0.5	8	9.5	M6 P1.0	-	196.0	10.3	071054	DO-28-B0.5-JH
3	30	7	0.5	8	9.5	M6 P1.0	-	196.0	10.3	071070	DO-30-B0.5-JH
3	35	7	0.5	8	9.5	M6 P1.0	-	196.0	11.7	071071	DO-35-B0.5-JH

*All products are made-to-order only, but some may be in stock. Please contact your local distributor or trading company in case of urgent need.