



Model 1 Screw shaft (Cross recessed head)

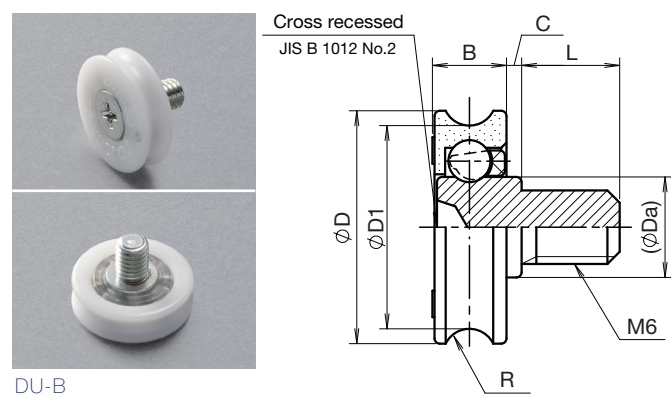


DU-B

Model 2 Screw shaft (Cross recessed head and rosette coined)

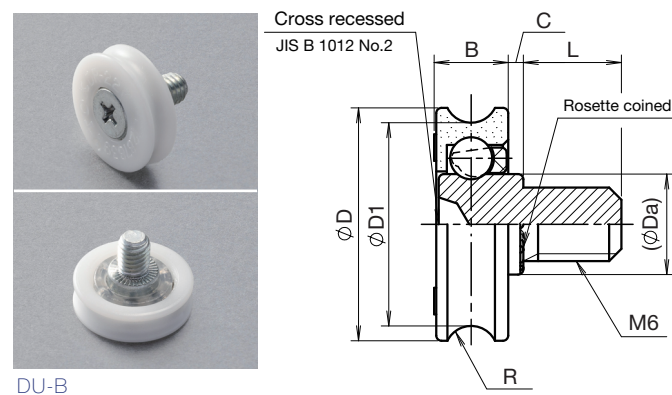

DU-B

Model 3 Screw shaft (Hex socket screw)

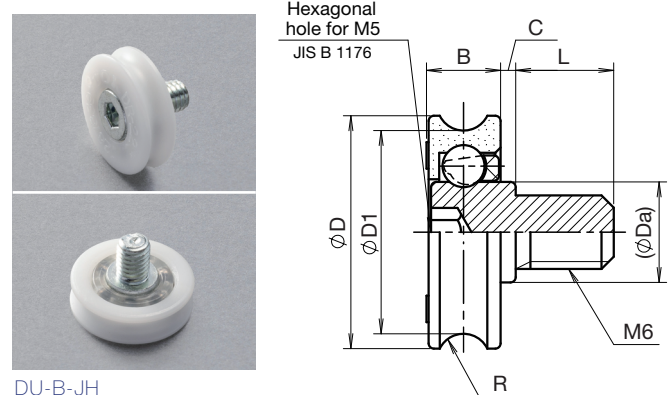

DU-B-JH

Product information

Feature classification

Outer race type

Flat	Convex round	U-groove
V-groove	Concave groove	One-sided flange
Plastic	Stainless steel	Steel
Ceramic	Rubber	

Inner race type

Inner ring	Inner race width wide
Screw shaft	Riveting shaft

Feature

Water resistant	Heat resistant	Chemical resistant
Antistatic	Non magnetic	High speed rotation
High load	Toughness	Low noise

Components of product name

No	Item	Symbol	Meaning
1	Outer race material symbol	D	Polyacetal resin
2	Outer race shape symbol	U	U-groove
3	Retainer or full ball type	Omitted	Retainer (Polypropylene)
4	Outer race outer diameter	-	(Numerical ϕD dimension shown in drawing)
5	Ball material symbol	Omitted	Carbon steel ball
6	Inner race shape symbol	B	Screw shaft
7	Inner race material symbol	Omitted	Carbon steel (Plating)
8	Bore and clearance dimension for mounting	-	(Numerical C dimension shown in drawing)
9	Additional information	M6×8 JH	Screw specification × Screw length L dimension Hex socket screw

Lineup

DU-B

Screw shaft

Model	D ± 0.2	D1 ± 0.1	B $\begin{smallmatrix} 0 \\ -0.2 \end{smallmatrix}$	C ± 0.4	L ± 0.5	R	Da	Screw specification	Rosette coined	Load (N)	Weight (g)	Code	Part No.
1	19	17	6	0.5	8	1.75	8.2	M6 P1.0	-	39.2	4.9	081010	DU-19-B0.5
2		17	6	1	8	1.75	8.2	M6 P1.0	●	39.2	-	-	DU-19-B1-M6×8
2		17	6	2	8	1.75	8.2	M6 P1.0	●	39.2	6.3	081013	DU-19-B2
1	22	19.2	7	0.5	8	2.5	9.5	M6 P1.0	-	156.0	8.2	081020	DU-22-B0.5
2		19.2	7	1	8	2.5	9.5	M6 P1.0	●	156.0	-	081024	DU-22-B1
2		19.2	7	2	8	2.5	9.5	M6 P1.0	●	156.0	-	-	DU-22-B2-M6×8
1	24	21.2	7	0.5	8	2.5	9.5	M6 P1.0	-	156.0	-	081030	DU-24-B0.5
1	26	23.2	7	0.5	8	2.5	9.5	M6 P1.0	-	156.0	-	081040	DU-26-B0.5
1	28	24	7	0.5	8	2.5	9.5	M6 P1.0	-	156.0	-	-	DU-28-B0.5-M6×8
1	30 $\begin{smallmatrix} 0 \\ -0.5 \end{smallmatrix}$	25.7	7 $\begin{smallmatrix} +0.2 \\ 0 \end{smallmatrix}$	0.5	8	2.5	9.5	M6 P1.0	-	156.0	-	081060	DU-30-B0.5

DU-B-JH

Screw shaft (Hex socket screw)

Model	D ± 0.2	D1 ± 0.1	B $\begin{smallmatrix} 0 \\ -0.2 \end{smallmatrix}$	C ± 0.4	L ± 0.5	R	Da	Screw specification	Rosette coined	Load (N)	Weight (g)	Code	Part No.
3	22	19.2	7	0.5	8	2.5	9.5	M6 P1.0	-	156.0	-	081086	DU-22-B0.5-JH
3	24	21.2	7	0.5	8	2.5	9.5	M6 P1.0	-	156.0	-	081036	DU-24-B0.5-JH
3	26	23.2	7	0.5	8	2.5	9.5	M6 P1.0	-	156.0	-	081044	DU-26-B0.5-JH
3	28	24	7	0.5 $\begin{smallmatrix} +0.5 \\ -0.4 \end{smallmatrix}$	8	2.5	9.5	M6 P1.0	-	156.0	-	081052	DU-28-B0.5-JH
3	30	25.7	7	0.5	8	2.5	9.5	M6 P1.0	-	156.0	-	081065	DU-30-B0.5-JH
3	35	31	7	0.5	8	2.5	9.5	M6 P1.0	-	156.0	-	081066	DU-35-B0.5-JH

*All products are made-to-order only, but some may be in stock. Please contact your local distributor or trading company in case of urgent need.