


Model 1 Riveting shaft (Full ball)




DR-A

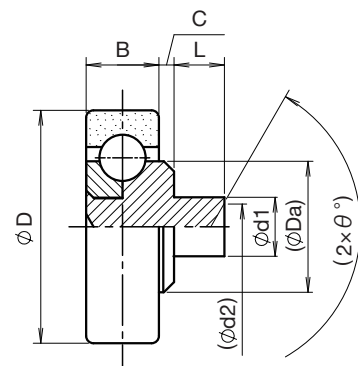

Model 2 Riveting shaft (Retainer)



DR-A

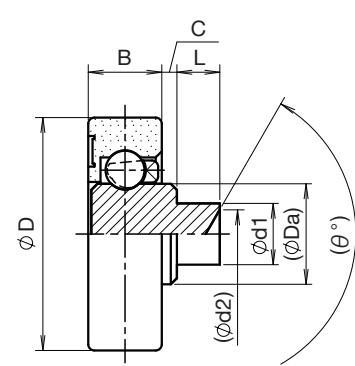

Product information

Feature classification

Outer race type

Flat	Convex round	U-groove
V-groove	Concave groove	One-sided flange
Plastic	Stainless steel	Steel
Ceramic	Rubber	

Inner race type

Inner ring	Inner race width wide
Screw shaft	Riveting shaft

Feature

Water resistant	Heat resistant	Chemical resistant
Antistatic	Non magnetic	High speed rotation
High load	Toughness	Low noise

Components of product name

No	Item	Symbol	Meaning
1	Outer race material symbol	D	Polyacetal resin
2	Outer race shape symbol	R	Flat
3	Retainer or full ball type	Omitted S	Retainer (Polypropylene) Full ball
4	Outer race outer diameter	-	(Numerical ϕ D dimension shown in drawing)
5	Ball material symbol	Omitted	Carbon steel ball
6	Inner race shape symbol	A	Riveting shaft
7	Inner race material symbol	Omitted	Carbon steel (Plating)
8	Bore and clearance dimension for mounting	-	(Numerical ϕ C dimension shown in drawing)

Lineup

DR-A

Riveting shaft

(mm)

Model	D $\begin{smallmatrix} 0 \\ -0.1 \end{smallmatrix}$	d1 $\begin{smallmatrix} 0 \\ -0.1 \end{smallmatrix}$	B $\begin{smallmatrix} 0 \\ -0.2 \end{smallmatrix}$	C ± 0.4	L ± 0.2	d2 $\times\theta$	Da	Load (N)	Weight (g)	Code	Part No.
1	16 $\begin{smallmatrix} 0 \\ -0.3 \end{smallmatrix}$	4	5 ± 0.2	0.5	3.5	3 $\times$ 100°	9.0	19.6	-	-	DRS-16-A0.5
1		4	5 ± 0.2	0.5	1	3 $\times$ 100°	9.0	19.6	4.4	000001	DRS-16-A1
2	19	5	6	0.5	3.5	4 $\times$ 120°	8.2	29.4	5.0	000200	DR-19-A0.5
2		5	6	1	3.5	4 $\times$ 120°	8.2	29.4	-	-	DR-19-A1
2		5	6	2	3.5	4.4 $\times$ 120°	8.2	29.4	6.0	000207	DR-19-A2
2	22	5	7	0.5	3.5	4 $\times$ 120°	9.5	29.4	-	-	DR-22-A0.5
2		5	7	1	3.4	4.6 $\times$ 90°	9.5	78.4	8.1	000400	DR-22-A1
2		5	7	2	3.5	4 $\times$ 90°	9.5	78.4	7.7	000411	DR-22-A2
2	26	5	7	0.5	3.5	4 $\times$ 120°	9.5	78.4	-	-	DR-26-A0.5
2		5	7	1	3.5	4.6 $\times$ 90°	9.5	78.4	9.4	000700	DR-26-A1
2		5	7	2	3.5	4.6 $\times$ 90°	9.5	78.4	-	-	DR-26-A2
2	30	5	7	0.5	3.5	4 $\times$ 120°	9.5	78.4	-	-	DR-30-A0.5
2		5	7	1	3.5	4.6 $\times$ 90°	9.5	78.4	-	-	DR-30-A1

*All products are made-to-order only, but some may be in stock. Please contact your local distributor or trading company in case of urgent need.